


TECH SHEET

CASEWORK INTEGRATED LED SYSTEM

build better™
DIRTT

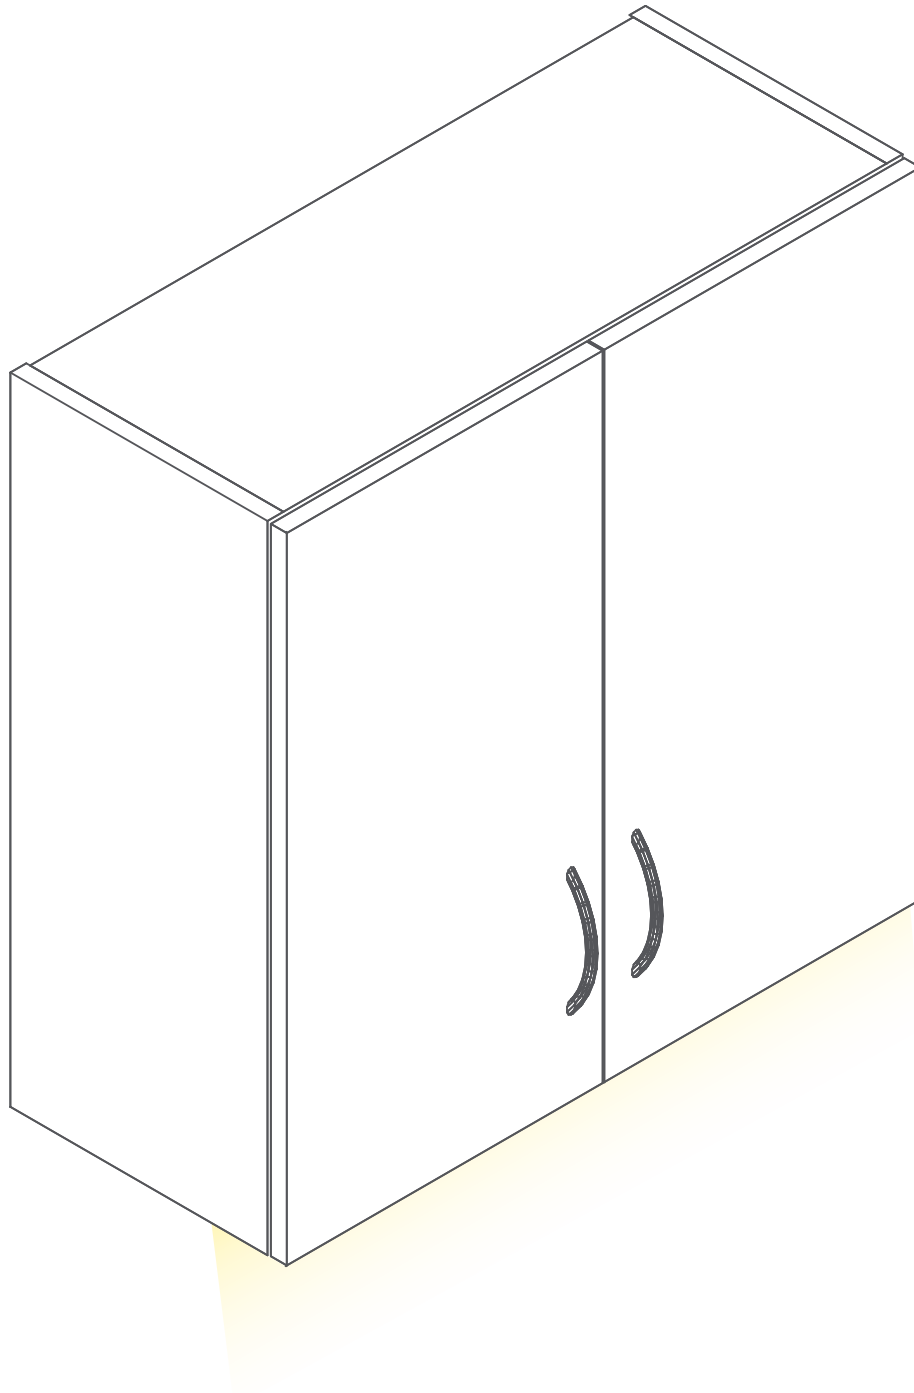

INTEGRATED LED COMPONENTS & DETAILS

NOTE: All Integrated LED components are from Hafele - Loox. For more details, check out the Hafele [site](#).

LED DRIVER, 12V CONSTANT, 0-40W

See drawing.

Voltage	12 volts (V)
Wattage	0 - 40 watts (W)
Width	2 $\frac{3}{8}$ " (60mm)
Length	7 $\frac{1}{2}$ " (190mm)

POWER CORD FOR DRIVER, LOOX LED

90° 2-prong US plug, 2m, see drawing.

Voltage	300V
Model	110vac
Length	78 $\frac{3}{4}$ " (2.00m)
Height	1 $\frac{3}{8}$ " (35mm)
Width	1 $\frac{3}{16}$ " (30mm)
Material	Plastic
Color	Black
Mounting	Plug Mount
Cable Spec	SPT-2, 2 x 18 American wire gauge (AWG)
Primary Cord Plug Type	National Electrical Manufacturers Association (NEMA) 1-15P (non-polarized)
Secondary Cord Plug Type	45° angle low profile IEC-60320-C7
Temp Rating	105° celcius (C)

EXTENSION LEAD, 2000mm, 12V, LOOX

See drawing.

Volts	12V
Length	78 $\frac{3}{4}$ " (2.00m)
Material	Plastic
Color	Black and Yellow

NOTE: Lead length from driver to light maximum 19 $\frac{5}{16}$ " (500mm).

6-WAY DISTRIBUTOR, WITH OR WITHOUT SWITCHING, FOR USE WITH LOOX5 12V LIGHTS

3 ports, Bare Wire Ends


Voltage	12V
Watts	60W
Material	Plastic
Colour	Black

LEAD WITH 12V PLUG SYSTEM AND CLIP, FOR LOOX LED STRIP LIGHT MONOCHROME 8mm, 12V, AWG 18, 500mm


See drawing.

Voltage	12V
Material	Plastic
Colour	Black and Yellow


LED DRIVER, 12V CONSTANT, 20-40W

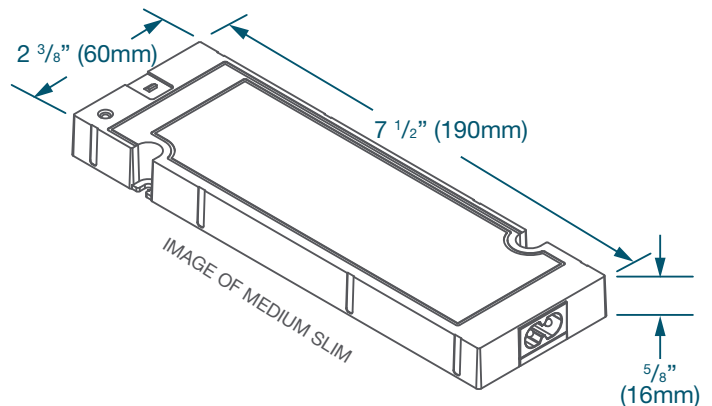


POWER CORD FOR DRIVER, LOOX LED

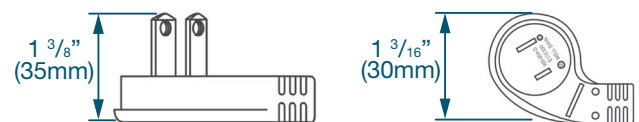

EXTENSION LEAD, 2000mm, 12V, LOOX

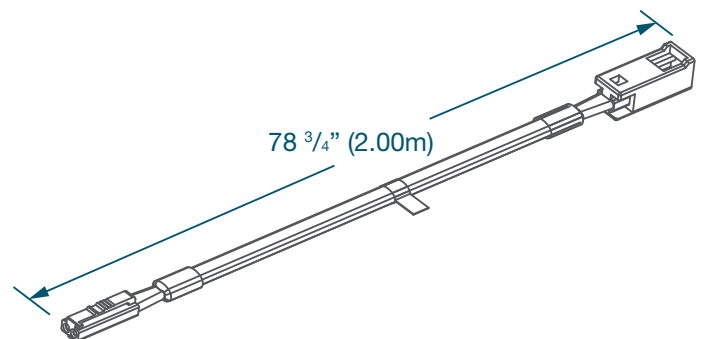

LEAD WITH 12V PLUG SYSTEM AND CLIP, FOR LOOX LED STRIP LIGHT

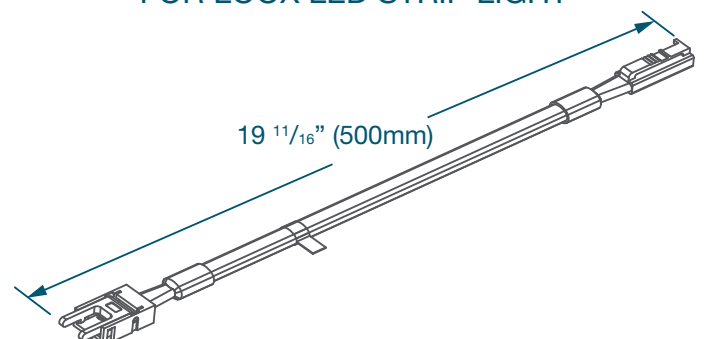

ALUMINUM PROFILE, FOR RECESS MOUNTING, FOR LOOX LED WITH TRANSLUCENT COVER

NOTE: Cut to fit in the factory. See drawing.

Length	98 3⁄8" (2.5m)
Width	1 1⁄16" (17mm)
Height	1⁄2" (13mm)
Material	Aluminum
Mounting	Recess Mounting

END CAP, FOR RECESSED EXTRUSION, FOR LOOX LED

See drawing.

Material	Plastic
Color	Silver coated

FLEXIBLE STRIP LIGHT, LOOX5 LED 2065, MONOCHROME, 12V, COOL 4000 KELVIN (K)

See drawing.

Color	Cool White (4000 K)
Voltage	12V
Wattage	4.8 W per meter
Width	5⁄16" (8mm)
Height	1⁄16" (1mm)
Number of LEDs	60
Energy Efficiency Class	A+
Energy Consumption	Weighted 5.28kWH/1,000 h
Mounting	Self-adhesive
Material	Plastic
Finish	White

FLEXIBLE STRIP LIGHT, LOOX, LED 2065, 12V, WARM 3000K


See drawing.

Color	Warm White (3000 K)
Voltage	12V
Wattage	4.8 W per meter
Width	5⁄16" (8mm)
Height	1⁄16" (1mm)
Number of LEDs	60
Energy Efficiency Class	A+
Energy Consumption	Weighted 5.28kWH/1,000 h
Mounting	Self-adhesive
Material	Plastic
Finish	White


METAL SHELF PIN

Material	Metal
Finish	Zinc
Features	Anti-Tip
Projection - Overall Dimensions	5⁄16" (8mm)
Length - Overall Dimensions	5⁄8" (16mm)
Minimum Shelf Thickness	5⁄8" (16mm)
Appearance	Invisible
Load Capacity per Shelf	45 kg

END CAP, FOR RECESSED EXTRUSION, FOR LOOX LED



FLEXIBLE STRIP LIGHT, LOOX5 LED 2065, MONOCHROME, 12V, WARM 3000K/COOL4000K

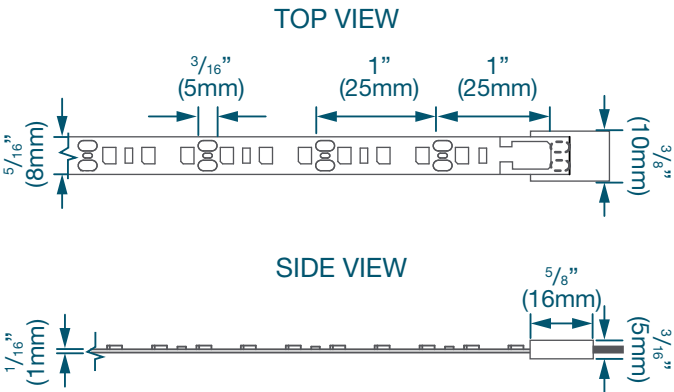

CABINET INTERIOR AND VALANCE

