



COMPONENTS & MATERIALS

Bar Pull Assembly Materials

- SUS304 Stainless Steel handle includes:
- 2pcs

SUS304 stainless steel Handle
- 4pcs

SUS304 stainless steel Rosette 1" (25mm) diameter
- 4pcs

SUS304 stainless steel Decorative Cap
- 6pcs

Upper/Lower Threaded Bolt
- 2pcs

M5\*5 SUS304 stainless steel fixed-set Allen Screw
- 1pcs

Zinc plated steel Allen Key

Finishes

Comparable finish of BHMA 630 / US32D / C32D

Options


- Top Locking Bar Pull
- Matching Slim Top Locking Bar Pull dimensions (see separate Technical sheet)

DIMENSIONS & DETAILS

|                                            |                             |
|--------------------------------------------|-----------------------------|
| <b>Thickness</b>                           |                             |
| Handle Wall Thickness                      | 1⁄16" (1.2mm)               |
| <b>Diameter</b>                            |                             |
| Handle Diameter                            | 1" (25mm)                   |
| Mounting Stems (at top & bottom of handle) | 3⁄4" (19mm)                 |
| <b>Short Handle Length*</b>                |                             |
| Dimension A                                | 13994<br>69 5⁄16" (1761mm)  |
| <b>Medium Handle Length*</b>               |                             |
| Dimension A                                | 13995<br>81 13⁄16" (2078mm) |
| <b>Long Handle Length*</b>                 |                             |
| Dimension A                                | 13996<br>93 3⁄4" (2382mm)   |

\*Handle length is determined by door/system height. See Dimension A on attached plan diagrams.

DIMENSIONS: SLIM BAR PULL - NON LOCKING

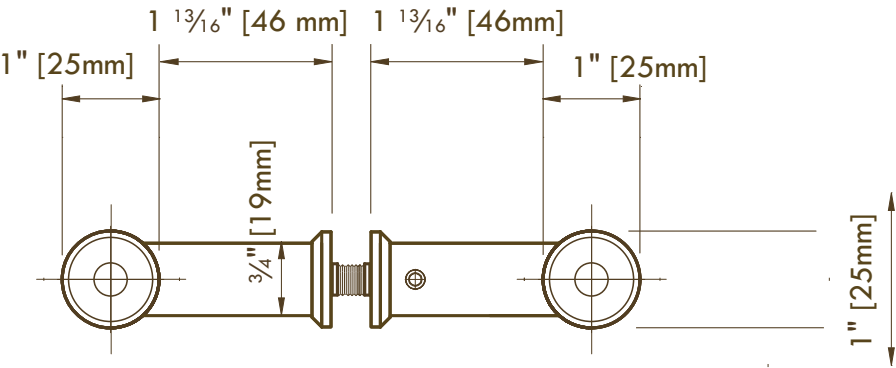

PLAN VIEW  
(NTS)

DIMENSIONS  
SLIM BAR PULL - NON LOCKING

