

COMPONENTS & MATERIALS

Bar Pull Assembly Materials

SUS304 Stainless Steel handle includes:

1 pcs	SUS304 extended stainless steel Handle (with internal gear driven Lock Rod – thumbturn side)
1 pcs	SUS304 stainless steel Handle (key side)
1 pcs	SUS304 stainless steel Thumbturn
1 set	Locking Parts with Cylinder
4 pcs	Black nylon Rosettes – 35mm diameter
2 pcs	Black nylon Rosettes – 45mm diameter
6 pcs	Upper/Lower Threaded Stud (SUS304 M8*45, 63, 76mm each 2 pcs)
2 pcs	Upper/Lower Collar
4 pcs	SUS304 stainless steel Decorative Bottom
3 pcs	M5*5 SUS304 stainless steel fixed-set Allen Screws
1 pcs	Zinc plated steel Allen Key

Cylinder/Lock Components

Lock is comprised of DIRTТ proprietary parts with a Schlage cylinder Standard Lock Cylinder

Schlage 26-098	Full Size Interchangeable Core Cylinder
Length	1 1/2" (37mm) long
Thread size	1.150" – 32 UNS-2A 6 pin; "C" Keyway

Finishes

Comparable finish of BHMA 630 / US32D / C32D

Options

Customers Own Cylinders

Must be reviewed and approved by DIRTТ prior to order placement; additional parts may be required

Non-locking Bar Pull (Top Locking Dummy)

Bar Pull 'dummy' matching Top Locking Bar Pull dimensions less middle lock setup. (see separate Top Locking Dummy Bar Pull Technical sheet)

DIMENSIONS & DETAILS

Thickness

Handle Wall Thickness	1/16" (1.2mm)
-----------------------	---------------

Diameter

Handle Diameter	1 3/8" (35mm)
Mounting Stems (at top & bottom of handle)	1 3/8" (35mm)
Mounting Stems (at lock cylinder)	1 3/4" (45mm)

Short Handle Length* (13948)

Dimension A	69 5/16" (1761mm)
Dimension B	73 5/16" (1862mm)

Medium Handle Length* (13949)

Dimension A	81 13/16" (2078mm)
Dimension B	85 13/16" (2180mm)

Long Handle Length* (13950)

Dimension A	93 3/4" (2382mm)
Dimension B	97 3/4" (2484mm)


Lock Throw

Diameter of Lock Throw	1 1/16" (17mm)
Length of Lock Throw	1 1/2" (37mm)

*Handle length is determined by door/system height. See Dimension A and B on attached plan diagrams.

NOTE: This hardware is not intended for use on means of egress doors. The code is enforced differently in every jurisdiction; make sure your Authority Having Jurisdiction confirms compliancy based on intended application prior to order placement.

DIMENSIONS - TOP LOCKING BAR PULL

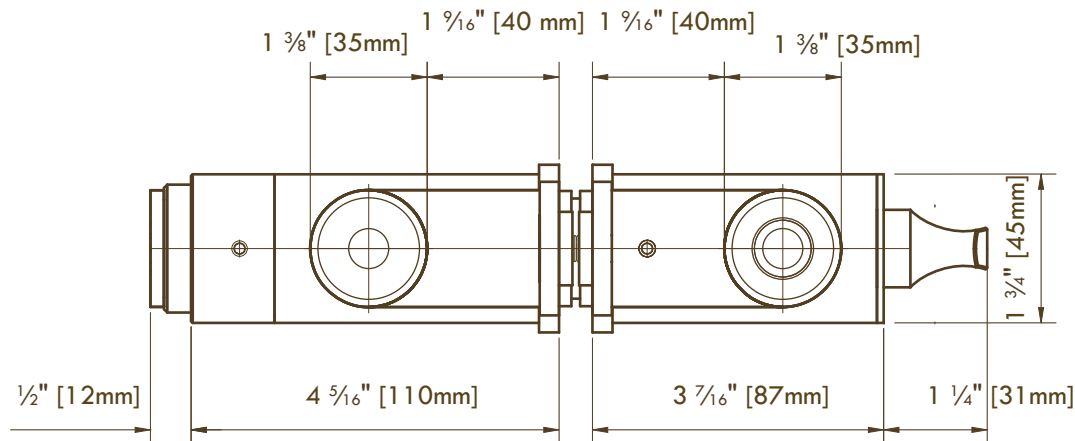

PLAN VIEW

(NTS)

DIMENSIONS TOP LOCKING BAR PULL

