


WriteAway Panel

Tech Sheet



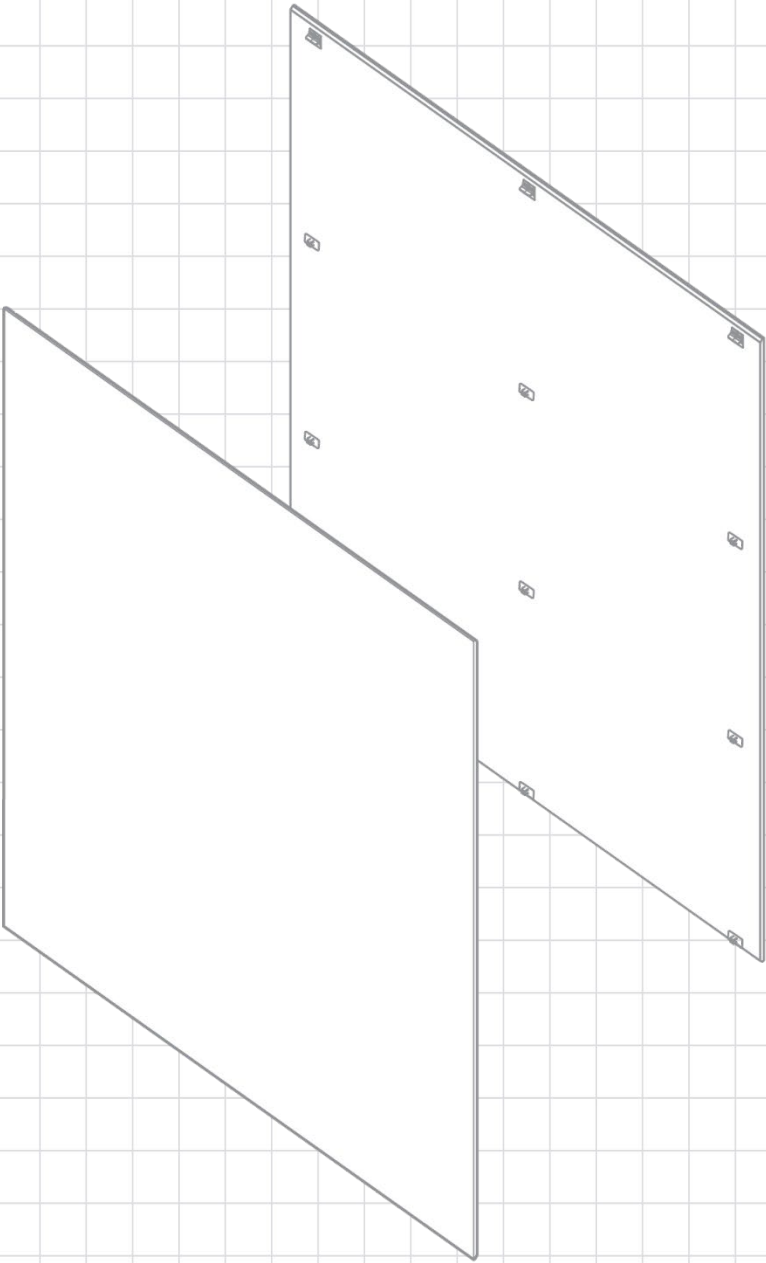

COMPONENTS + MATERIALS

PANEL SUBSTRATE

½" (13mm) medium-density fiberboard (MDF) no-added formaldehyde (NAF) with low-pressure laminate (LPL) on one side.

MOUNTING COMPONENTS

Hanger Clips (Panel Hooks)	Nylon
11mm BATS Clips–Stapled	Polycarbonate

WRITEAWAY FILM FINISH

WriteAway™ film is an intermediate performance PVC film laminated with a polyester writing surface. The surface uses a proprietary formulation that ensures optimized stability and resistance to ultraviolet (UV) degradation.

WriteAway is available in high-gloss or matte finish.

DIMENSIONS + DETAILS

Minimum Panel Width/Height	5 ½" (140mm)
Maximum Panel Width*	46" (1.17m)**
Maximum Panel Height*	120" (3.045m)

***NOTE:** Panels can be oriented vertically in a monolithic application or horizontally to span multiple frames; overall size cannot exceed 46" (1.17m) in two directions.

****NOTE:** Panels can be oriented vertically in a monolithic application or horizontally to span multiple frames. The overall size should not exceed 46" (1.17m) in two directions, but, depending on the finish, it can be larger on a case by case basis.

PANEL CONNECTIONS TO SOLID FRAME

Panel Hooks located at top of panels.

11mm BATS Clips located on bottom edges.

11mm BATS Clips located intermittently between clip lines greater than 39 ½" (1.01m).

TESTING RESULTS

ASTM E84 "Standard Test Methods for Surface Burning Characteristics of Building Materials"

WriteAway on Standard MDF Finish Substrate with LPL Backer

Flame spread/Smoke-developed indexes	120/170
Finish Classification	Class C

WriteAway On FR MDF Finish Substrate with LPL Backer

Flame spread/Smoke-developed indexes	15/65
Finish Classification	Class A

CAN/ULC S102 "Standard Test Methods for Surface Burning Characteristics of Building Materials and Assemblies"

NOTE: See manufacturer for flame spread/smoke-developed performance and resulting [Finish Classification](#).

NOTE: Testing reports, details and approvals are available upon request.

OPTIONS

FINISH OPTIONS

See [myDIRTT](#) for standard WriteAway color options.

Custom graphics and options as approved by DIRTT Custom Finishes.

ELECTRICAL AND COMMUNICATION OPTIONS

Ports cut out for electrical and communication boxes.

See [DIRTT Power Tech Sheets](#) for electrical options.

SUBSTRATE OPTIONS

Fire Retardant (FR) NAF MDF

Forest Stewardship Council (FSC) Certified MDF with LPL Backer*

FSC + NAF MDF*

FSC + NAF + FR MDF*

***NOTE:** FSC and FR may require longer lead times and minimum-order quantities.

PANEL CONFIGURATION OPTIONS

Panels can be applied over multiple frames.

Panels oversized to be scribed to the floor*

***NOTE:** Panels scribed to the floor on-site require special equipment and specific procedures must be followed.