


TECH SHEET

DIRTT POWER - EXTENDER CABLE

build better™
DIRTT

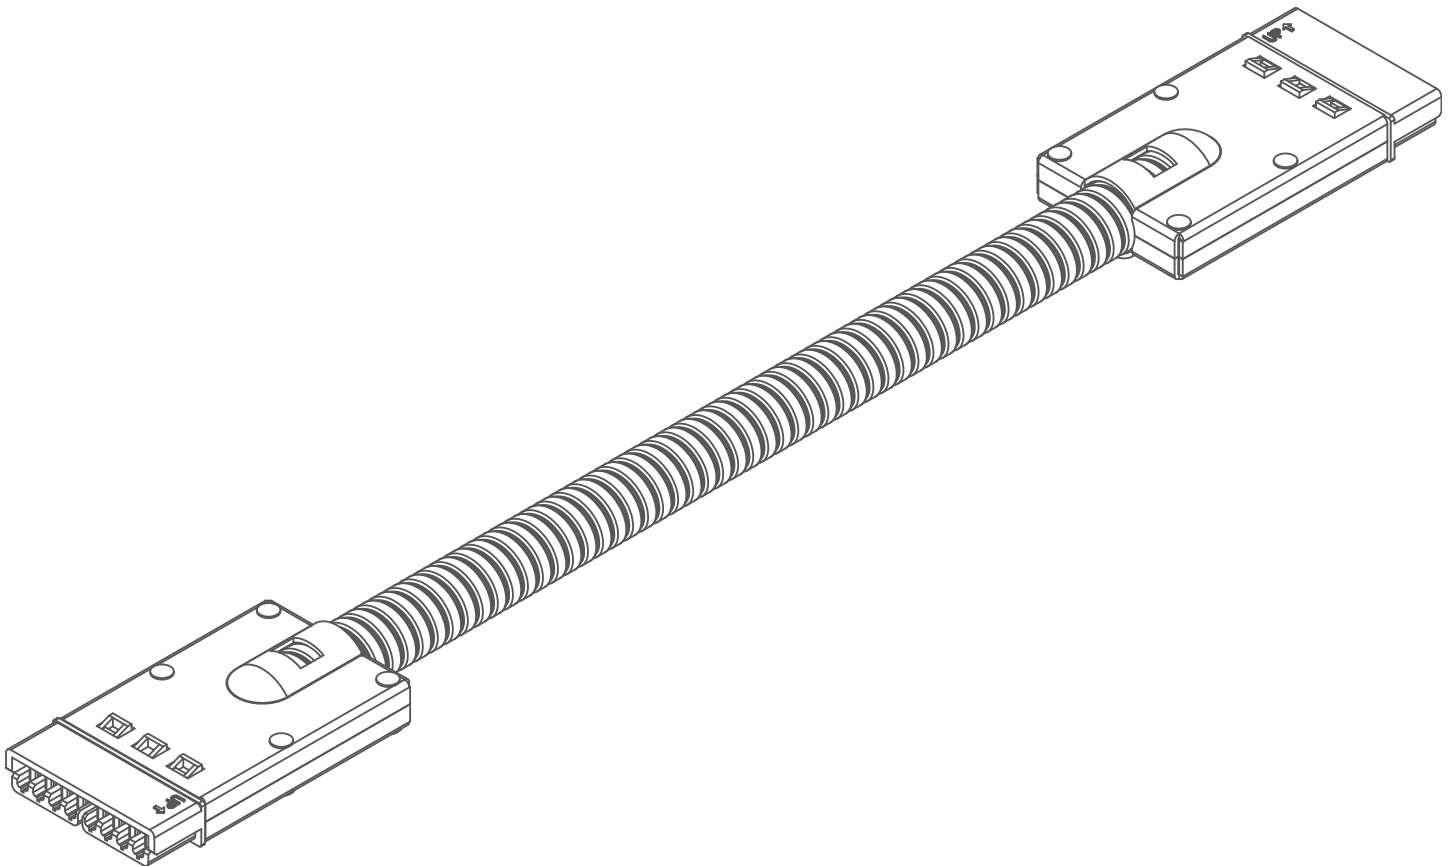

COMPONENTS AND MATERIALS

The Extender cable is the component that transfers the power from a distribution point to an access point. The Extender cable is available in 3, 5 and 8 wire shared neutral 4/2/2 and 8 wire independent neutral 3/3/2 configurations.

GENERAL SPECIFICATIONS

- Designed to distribute 4 circuit 4/2/2 or 3 circuit 3/3/2
- 2 port device with both female ports
- 4/2/2 and 3/3/2 systems are keyed differently to prevent interconnecting of the different systems
- The Extender receives circuits from the power distribution box and transfers them to any access point
- Extra flex conduit
- Rated for 120V 20amp service
- Available in 5'-0" (1.52m), 10'-0" (3.05m), 15'-0" (4.57m), 20'-0" (6.10m) lengths as standard. Custom and longer lengths available upon request

LISTINGS


- Underwriters Laboratories (UL) Standard (Std.) 1286
- UL Std. 183
- Canadian Standards Association (CSA) Certified per CSA standard/ Nationally Recognized Testing Laboratories (NRTL)

EXTENDER


- 4/2/2 System
 - 3 wire - 1 circuit
 - 5 wire - 3 circuits
 - 8 wire - 4 circuits
- 3/3/2 System
 - 8 wire - 3 circuits

CABLE DIMENSIONS AND SPECIFICATIONS

TOP VIEW

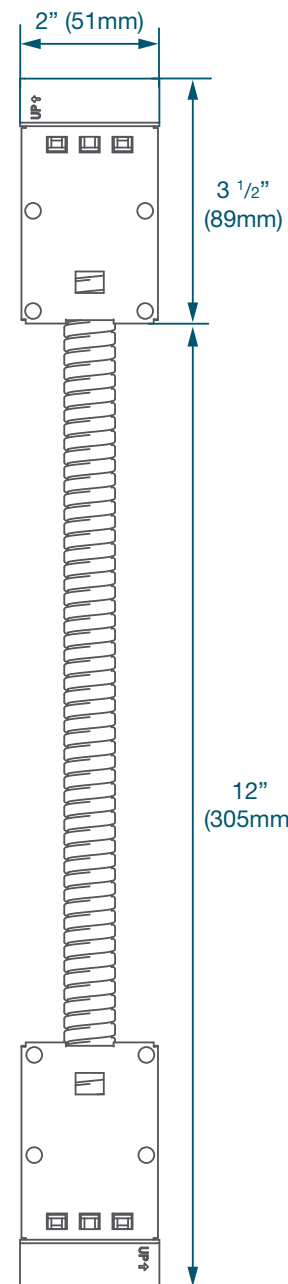

SIDE VIEW

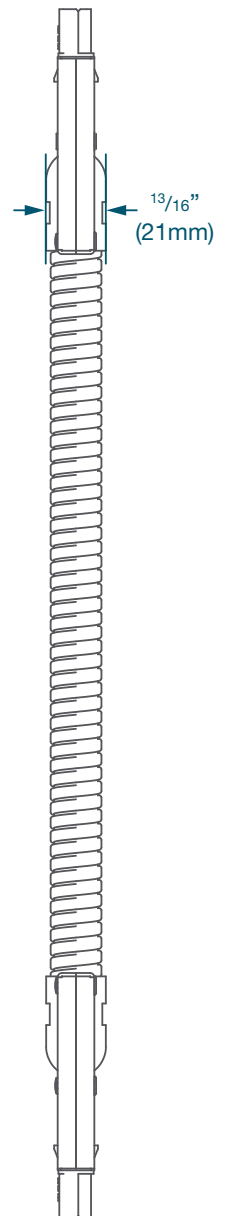

END VIEW

