


TECH SHEET

CWB 1,2,3,4 WITH QUICK CONNECT WHIPS

build better™
DIRTT

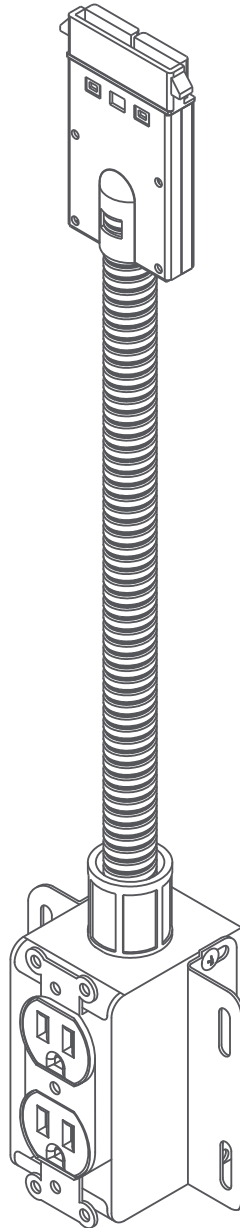

COMPONENTS AND MATERIALS

The Conventional Wall Box (CWB) with Quick Connect Whip facilitates installing duplex power outlets in a fixed-in-place environment. The outlets are contained in a metal enclosure. The CWB can be configured to meet the requirements of even the most comprehensive specification and intense user requirements.

GENERAL SPECIFICATIONS

- 15 amp 120V/208Y 60Hz
- 20 amp 120V/208Y 60Hz
- Available constructions:
 - Prewired with a minimum length 15" (381mm) whip with a quick-connecting end
- Available in multi-ganged options (1-4 gangs)
- Faceplates supplied and ordered "by others"
- Receptacles supplied and installed by DIRTT:
 - Can be built with commercial- or patient care-grade receptacles and patient care-grade whip
- Available in 3/3/2 independent neutral or 4/2/2 shared neutral configurations
- Connectors come with color-coded tags and polarity keys to prevent interconnection of 3/3/2 and 4/2/2 circuit components

LISTINGS

- Underwriters Laboratories (UL) Standards (Std.):
 - 183: Standard for Manufactured Wiring Systems
 - 514A: Metallic Outlet Boxes
 - 5: Surface Metal Raceways and Fittings
 - 5A: Nonmetallic Surface Raceways and Fittings
- Canadian Standards Association (CSA) certified per CSA standard C22.2 No. 203.1

APPLICABLE CODES


- CWB must be installed in accordance with the National Electrical Code (NEC), Canadian Electrical Code (CEC) and local electrical codes

BOX DIMENSIONS AND SPECIFICATIONS


1 GANG

FRONT VIEW


BACK VIEW

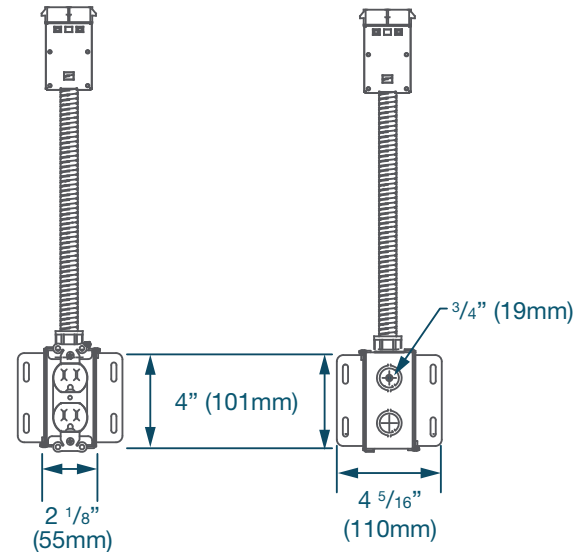


TOP VIEW




SIDE VIEW

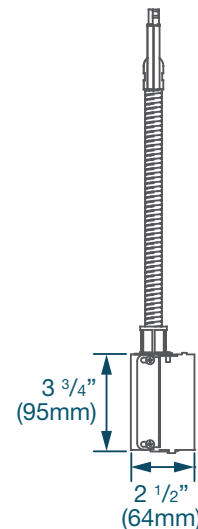


2 GANG

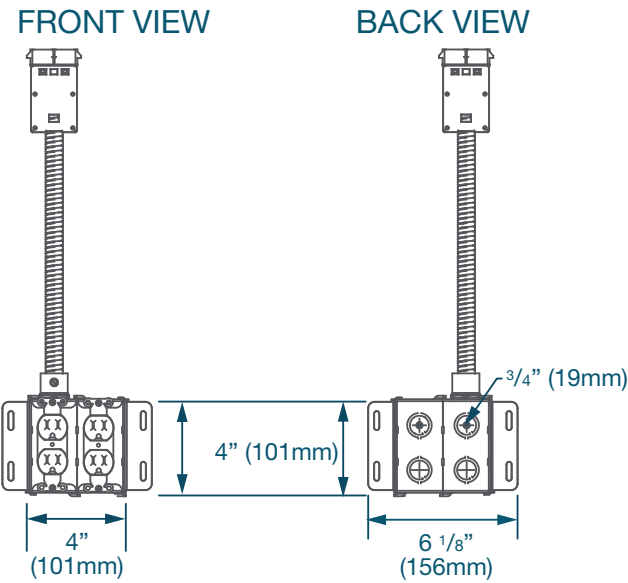


3 GANG

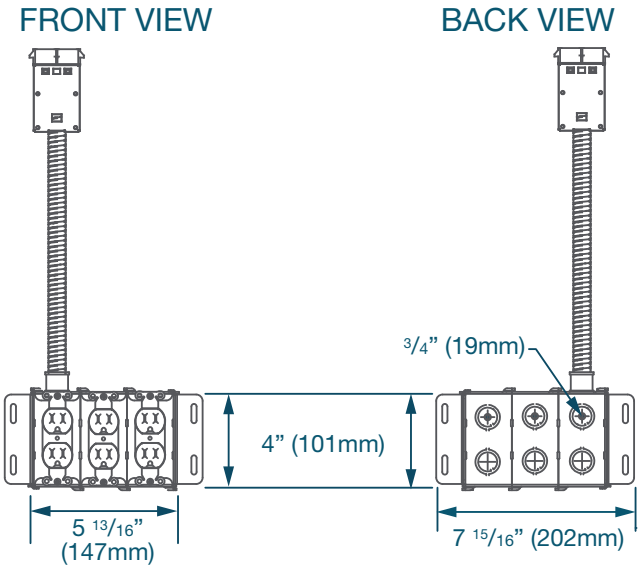


TOP VIEW




TOP VIEW



SIDE VIEW

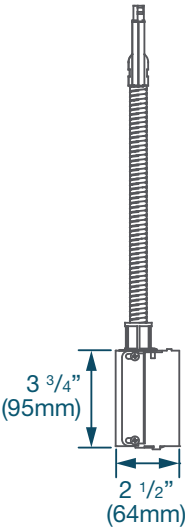


SIDE VIEW

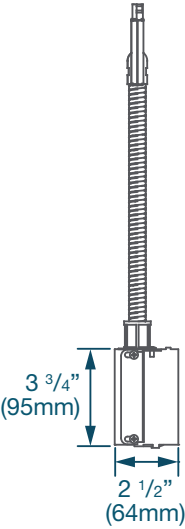


4 GANG

FRONT VIEW

BACK VIEW

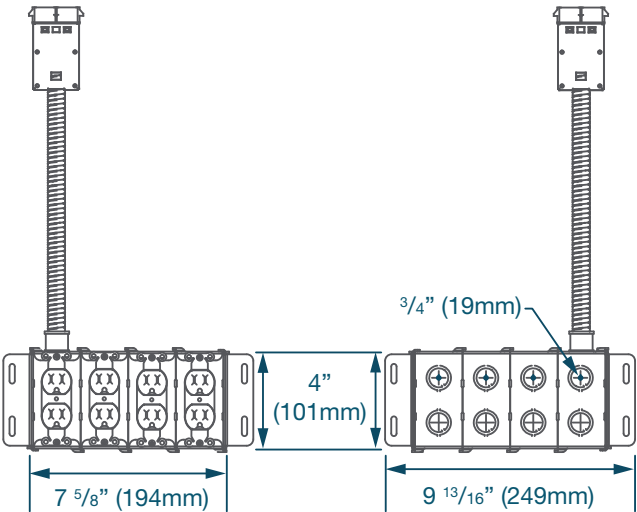

TOP VIEW

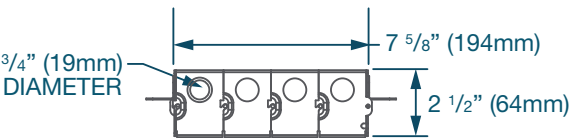

SIDE VIEW

